

TECHNICAL DATA SHEET

# PMAFLEX - R90 - Corrugated Conduit

Very flexible, medium-grade



For robotic applications with multi-axial movements



**Applications:**

- For dynamically moving conduit systems in robotics and the automation industry

**Features & Benefits:**

- High resistance to dynamic loads
- Excellent flexibility in combination with Very Good mechanical properties
- Improved chafing resistance
- High torsion and elongation stiffness
- Long service life

**Materials:**

- Specially modified polyamide 12

**Compatible with:**

- PMA Automation Products
- PMAGRIP flange
- PMA accessories

**Temperature range:**

- -40°C ... +95°C continuous, +150°C short-term

**Weathering resistance:**

- Excellent UV resistance and weathering characteristics

**Colour:**

- Black


**Chemical properties:**

- Please refer to [www.pma.ch](http://www.pma.ch) (Technical Information / Chemical Resistance)

**Environmental properties:**


- Free from halogens and cadmium
- RoHS and REACH compliant

**R90-Index**

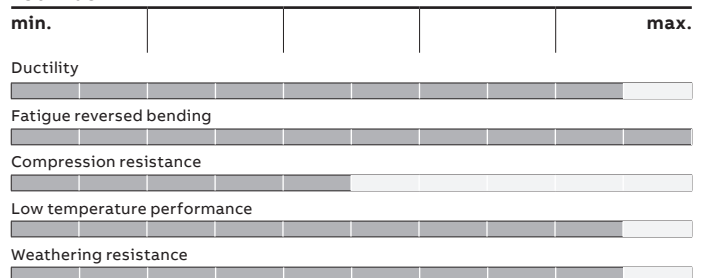

**Product selection:**

Part no.	Profile	Conduit size	Dimensions in mm (nom.)				Weight kg/100 m	Packing unit metre
			d1	d2	stat. R	dyn. R.		
R90G-56B	G	56	56.3	67.5	110	270	33.0	30
R90G-70B	G	70	67.4	79.6	150	350	46.0	30

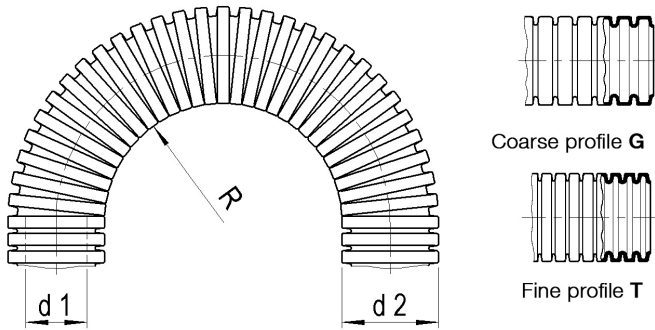

stat. R. = min. bending radius for static (fixed) installation

dyn. R. = min. bending radius for dynamic (flexible) installation

Mechanical Properties:	Value:	Test parameters:	Test method:
Impact	> 3 J		PMA DO 9.21-4330
Compression strength	> 130 N	(50 x 50 mm)	PMA DO 9.21-4320
	> 260 N	(100 x 100 mm)	PMA DO 9.21-4320
Resistance to fatigue	> 4'000'000 cycles		PMA DO 9.21-4420
	> 10'000'000 cycles		PMA DO 9.21-4425

Thermal properties:	Value:	Test parameters:	Test method:
Continuous application temperature	-40 ... +95°C		PMA DO 9.21-4510
Upper application temperature	+110°C	(20'000 h)	PMA DO 9.21-4360
Short-term	+150°C	(168 h)	PMA DO 9.21-4360

Fire safety properties:	Value:	Test parameters:	Test method:
Free from halogen and cadmium	yes		DIN 53474

ABB Switzerland Ltd,  
PMA Cable Protection  
Aathalstrasse 90  
8610 Uster, Switzerland  
Phone: +41 58 585 00 11  
pma-info@ch.abb.com  
www.pma.ch

Let's write the future.  
Together. **abb.com**

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. ABB Installation Products Inc. does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its contents – in whole or in parts – is forbidden without prior written consent of ABB Inc. Copyright© 2019 ABB Installation Products Inc. All rights reserved

