

TECHNICAL DATA SHEET

# PMAFLEX Multilayer - XSOL - Corrugated Conduit

Very flexible, medium-duty

**PMA**



Very flexible UL recognized conduit ideal for long-term external applications



**Applications:**

- All-purpose, especially for long-term external applications, e.g. energy technology, transportation

**Features & Benefits:**

- Very high flexibility
- Very good mechanical strength
- High impact resistance at low temperature and humidity
- Excellent fire safety characteristics
- Excellent chemical resistance
- NMPT-C

**Materials:**

- Outer layer: High-grade, specially formulated polyamide 12
- Intermediate layer: spec. bonding compound
- Inner layer: High-grade, specially formulated polyamide 6

**Compatible with:**

- PMAFIX Pro, PMAFIX fittings
- PMA accessories

**Temperature range:**

- -50°C ... +95°C continuous, +150°C short-term

**Conforms to:**

- UL 1696 (UL File E80294)
- CSA C22.2 No. 227.3-05 (CSA File LL 88703)

**Weathering resistance:**

- Excellent UV resistance and weathering characteristics

**Colour:**

- Outer layer: black, other colours on request
- Inner layer: green

**Chemical properties:**

- Please refer to [www.pma.ch](http://www.pma.ch) (Technical Information / Chemical Resistance)

**Environmental properties:**

- Free from halogens and cadmium
- RoHS and REACH compliant


**XSOL-Index**

	min.									max.
Ductility	[Progressive bar chart]									
Fatigue reversed bending	[Progressive bar chart]									
Compression resistance	[Progressive bar chart]									
Low temperature performance	[Progressive bar chart]									
Weathering resistance	[Progressive bar chart]									

**Product selection:**

Part no.	Profile	Conduit size		rec. fitting thread size		Dimensions in mm (nom.)			Weight kg/100 m	Packing unit metre
		NW	metric	PG	metric	d1	d2	stat. R		
XSOLT-10BG	T	10	12	9	M12x1.5	9.5	12.8	20	3.0	50
XSOLT-12BG	T	12	16	11	M16x1.5	11.9	15.6	25	4.0	50
XSOLG-17BG	G	17	20	16	M20x1.5	15.6	21.1	40	6.5	50
XSOLG-23BG	G	23	25	21	M25x1.5	21.9	28.4	50	10.0	50
XSOLG-29BG	G	29	32	29	M32x1.5	27.7	34.5	60	13.5	50
XSOLG-36BG	G	36	40	36	M40x1.5	36.4	42.4	75	16.0	30
XSOLG-48BG	G	48	50	48	M50x1.5	47.2	54.5	90	23.0	30

Our customer service dept. or local distribution partner will be pleased to help you concerning product availability and lead time

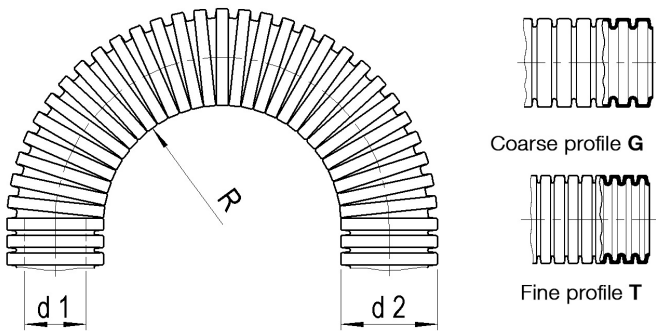

stat. R. = lowest recommended bending radius for static (fixed) installation

<b>Mechanical Properties:</b>	<b>Value:</b>	<b>Test parameters:</b>	<b>Test method:</b>
Impact strength	> 9 J	(+23°C)	PMA DO 9.21-4330
	> 12.2 J	(-18°C)	CSA C22.2 Nr. 227.3 / UL 1696
	class 3, > 2 J	(-45°C)	IEC EN 61386
Compression strength	> 250 N	(50 x 50 mm)	PMA DO 9.21-4320
	> 500 N	(100 x 100 mm)	PMA DO 9.21-4320
Reverse bending resistance	> 400'000 cycles		PMA DO 9.21-4420
	> 1'000'000 cycles		PMA DO 9.21-4425
<b>Pull-out resistance conduit - fitting series</b>			
PMAFIX Pro	> 350 N		PMA DO 9.21-4610
PMAFIX IP68	> 300 N		PMA DO 9.21-4610
PMAFIX IP66	> 250 N		PMA DO 9.21-4610
PMAFIX Pro, PMAFIX IP66 & IP68	class 2		IEC EN 61386

Note: Testing at 23°C, 50% r.h., conduit nominal width 17, unless otherwise stated

<b>Thermal properties:</b>	<b>Value:</b>	<b>Test parameters:</b>	<b>Test method:</b>
Continuous application temperature	-50 ... +95°C		PMA DO 9.21-4510
Upper application temperature	+110°C	(20'000 h)	PMA DO 9.21-4360
Short-term	+150°C	(168 h)	PMA DO 9.21-4360
Application temperature range	-18 ... +90°C		UL 1696/CSA 22.2 Nr. 227.3

<b>Fire safety properties:</b>	<b>Value:</b>	<b>Test parameters:</b>	<b>Test method:</b>
Fire performance	non flame-propagating		IEC EN 61386
Fire performance	V2		UL 94

ABB Switzerland Ltd,  
PMA Cable Protection  
Aathalstrasse 90  
8610 Uster, Switzerland  
Phone: +41 58 585 00 11  
pma-info@ch.abb.com  
www.pma.ch

Let's write the future.  
Together. **abb.com**

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. ABB Installation Products Inc. does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its contents – in whole or in parts – is forbidden without prior written consent of ABB Inc. Copyright© 2019 ABB Installation Products Inc. All rights reserved

