
 TECHNICAL DATA SHEET

PMA Divisible System - BLNO-M - Fitting

Straight, metric thread




IP54, one-piece, divisible fitting ideal for retrofit and repairs



Applications:

- In industry, plant construction, machine building as well as in house and electrical installations

Features & Benefits:

- Easy installation and reopening if necessary
- Conduit can be installed in fitting prior to closing
- Push-in installation of conduit into pre-installed fitting also possible
- High conduit pull-out strength
- Integrated thread sealing lip
- High impact resistance
- Very good chemical properties
- Fits both conduit profiles - fine (T) and coarse (G)

Ingress protection:

- IP54 - PMAFLEX closed conduits
- IP40 - PACOF/PPCOF Divisible conduits

Materials:

- High-grade, specially formulated polyamide 6

Compatible with:

- PMA standard, slit and divisible conduits with standard nominal widths

Weathering resistance:

- Very good UV resistance and weathering characteristics

Colour:

- Black

Chemical properties:

- Please refer to www.pma.ch (Technical Information / Chemical Resistance)


Environmental properties:

- Free from halogens and cadmium
- RoHS and REACH compliant

Product selection:

Part no.	Thread size	Conduit size	Dimensions in mm (nom.)					Weight	Packing unit
			g	L	H	d2	SW		
black	metric	NW	g	L	H	d2	SW	kg/100 pcs	pcs/PU
BLNO-M160	M16x1.5	10	13	37.5	20.0	20.5	17	0.3	50
BLNO-M162	M16x1.5	12	13	39.5	23.0	21.5	20	0.4	50
BLNO-M202	M20x1.5	12	13	39.5	23.0	26.0	20	0.6	50
BLNO-M207	M20x1.5	17	13	43.5	28.5	27.0	25	0.7	50
BLNO-M257	M25x1.5	17	14	44.5	28.5	31.0	25	0.9	50
BLNO-M253	M25x1.5	23	14	52.5	36.5	35.0	33	1.3	30
BLNO-M323	M32x1.5	23	17	56.0	36.5	40.0	33	1.7	30
BLNO-M329	M32x1.5	29	17	61.0	43.0	42.0	40	2.1	20
BLNO-M409	M40x1.5	29	21	65.0	43.0	49.0	40	2.5	20
BLNO-M406	M40x1.5	36	22	74.5	54.0	53.0	50	4.6	20
BLNO-M508	M50x1.5	48	22	80.5	66.0	65.0	62	6.5	10

Our customer service dept. or local distribution partner will be pleased to help you concerning product availability and lead time

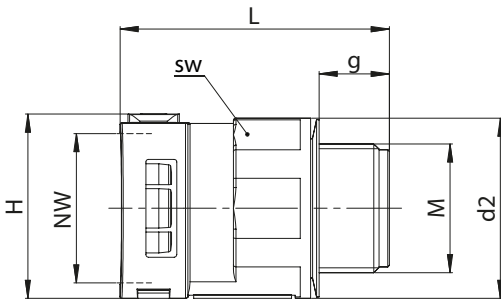

Mechanical Properties:	Value:	Test parameters:	Test method:
Stress-E-module	1'200 ... 3'700 N/mm ²		ISO 527
Tensile strength	45 ... 65 N/mm ²		ISO 527
Notched bar impact test	4 ... 20 kJ/m ²		ISO 180/1C

Thermal properties:	Value:	Test parameters:	Test method:
Continuous application temperature	- 40 ... +105 °C		PMA DO 9.21-4510
Upper application temperature	+ 120°C		PMA DO 9.21-4360
Short-term	+ 160 °C	(168 h)	PMA DO 9.21-4360

Fire safety properties:	Value:	Test parameters:	Test method:
Flame class	HB		UL 94

Content of delivery:

- Fitting

Assembly instructions:

- Push-in with a slight twist and pull back slightly to ensure the locking mechanism is fully engaged or lay in the conduit snap into place and lock the Fitting.

Please consider the appropriate assembly instructions on www.pma.ch

ABB Switzerland Ltd,
PMA Cable Protection
Aathalstrasse 90
8610 Uster, Switzerland
Phone: +41 58 585 00 11
pma-info@ch.abb.com
www.pma.ch

Let's write the future.
Together. **abb.com**

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. ABB Installation Products Inc. does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its contents – in whole or in parts – is forbidden without prior written consent of ABB Inc. Copyright © 2019 ABB Installation Products Inc. All rights reserved

