

TECHNICAL DATA SHEET

PMAFIX IP66 - BVIDA-U - Fitting

Straight, for AMP connector with UNEF female thread

PMA



One-piece, polyamide fitting for flexible non-metallic conduit



Applications:

- For cable protection systems in a wide range of applications

Features & Benefits:

- Easy installation: simple push fit assembly
- Very high impact resistance
- Vibration-proof connection to PMA conduits
- High conduit pull-out strength
- Can be easily re-opened with a screwdriver
- Very good chemical properties
- Fits both conduit profiles - fine (T) and coarse (G)

Ingress protection:

- IP66 (EN/IEC 60529)

Materials:

- High-grade, specially formulated polyamide 6

Compatible with:

- PMAFLEX Pro Conduits
- PMAFLEX Multilayer Conduits
- PMAFLEX Conduits
- PMA Smart Line Conduits
- AMP connector series CPC

Conforms to:

- EN 45545-2 HL3 (R22 & R23)
- NFPA 130
- UL 94 (V0)

Weathering resistance:

- Very good UV resistance and weathering characteristics

Colour:

- Black

Chemical properties:

- Please refer to www.pma.ch
(Technical Information / Chemical Resistance)


Environmental properties:

- Free from halogens and cadmium
- RoHS and REACH compliant

Product selection:

Part no.	Thread size	Conduit size	Connector size	Dimensions in mm (nom.)			Weight	Packing unit
				g	L	d2		
black	UN	NW	AMP	g	L	d2	kg/100 pcs	pcs/PU
BVIDA-U15MGT	5/8"-24 UNEF	7	11	8.0	31.5	21.5	0.5	100
BVIDA-U150GT	5/8"-24 UNEF	10	11	8.0	33.5	21.5	0.6	50
BVIDA-U152GT	5/8"-24 UNEF	12	11	8.0	36.5	21.5	0.7	50
BVIDA-U180GT	3/4"-20 UNEF	10	13	8.0	33.5	27.0	0.7	50
BVIDA-U182GT	3/4"-20 UNEF	12	13	8.0	36.5	27.0	0.8	50
BVIDA-U187GT	3/4"-20UNEF	17	13	8.0	44.5	27.0	1.2	50
BVIDA-U232GT	15/16"-20 UNEF	12	17	8.0	38.5	32.0	1.3	50
BVIDA-U237GT	15/16"-20 UNEF	17	17	8.0	46.5	32.0	1.5	50
BVIDA-U233GT	15/16"-20 UNEF	23	17	8.0	48.5	35.5	1.6	30
BVIDA-U323GT-11	15/16"-18 UNEF	23	-	11.0	52.0	44.0	2.5	30
BVIDA-U347GT	13/8"-18 UNEF	17	23	8.0	46.5	44.0	1.4	50
BVIDA-U343GT	13/8"-18 UNEF	23	23	8.0	48.5	44.0	1.5	30
BVIDA-U402GT	15/8"-18 UNEF	12	spec.	7.0	55.5	48.0	2.4	50
BVIDA-U407GT	15/8"-18 UNEF	17	spec.	7.0	61.5	48.0	2.6	50
BVIDA-U403GT	15/8"-18 UNEF	23	spec.	7.0	60.5	48.0	2.8	30

Our customer service dept. or local distribution partner will be pleased to help you concerning product availability and lead time

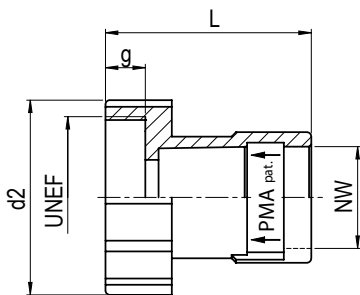

Mechanical Properties:	Value:	Test parameters:	Test method:
Tensile modulus	1'200 ... 3'700 N/mm ²		ISO 527
Tensile strength	45 ... 65 N/mm ²		ISO 527
Notched bar impact test	4 ... 20 kJ/m ²		ISO 180/1C
Vibration and shock standard	Cat. 2		IEC 61373, IEC 60068-2-27 / -64

Thermal properties:	Value:	Test parameters:	Test method:
Continuous application temperature	- 50 ... + 105 °C		PMA DO 9.21-4510
Upper application temperature	+ 120°C	(20'000 h)	PMA DO 9.21-4360
Short-term	+ 160 °C	(168 h)	PMA DO 9.21-4360

Fire safety properties:	Value:	Test parameters:	Test method:
Fire performance	non flame-propagating		IEC EN 61386-1
Flame class	V0		UL 94
Fire hazard level	HL3		EN 45545-2 (R22)
Oxygen index	> 32 %		EN ISO 4589-2
Smoke density	< 150 Ds max.		EN ISO 5659-2 (25 kW/m ²)
Toxicity	< 0.75 CIT _{NLP}		NF X 70-100-1/-2: (600°C)
Fire hazard level	HL3		EN 45545-2 (R23)
Oxygen index	> 32 %		EN ISO 4589-2
Smoke density	< 300 Ds max.		EN ISO 5659-2 (25 kW/m ²)
Toxicity	< 1.5 CIT _{NLP}		NF X 70-100-1/-2: (600°C)
Fire performance NFPA 130:			NFPA 130
- Flammability	compliant		ASTM E 162
- Smoke density	compliant		ASTM E 662
Heat and visible smoke	26.00 MJ/kg		ASTM E 1354
Smoke emission toxicity	compliant		Bombardier SMP 800-C
Smoke emission toxicity	compliant		Boeing BSS 7241

Content of delivery:

- Fitting with premounted clip

Assembly instructions:

- push-in with a slight twist and pull back slightly to ensure the conduit clicks into place.
- Please consider the appropriate assembly instructions on www.pma.ch

ABB Switzerland Ltd,
PMA Cable Protection
Aathalstrasse 90
8610 Uster, Switzerland
Phone: +41 58 585 00 11
pma-info@ch.abb.com
www.pma.ch

Let's write the future.
Together. **abb.com**

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. ABB Installation Products Inc. does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its contents – in whole or in parts – is forbidden without prior written consent of ABB Inc. Copyright© 2019 ABB Installation Products Inc. All rights reserved

